


DORO

design on speaking terms

Manual



doro afti 22

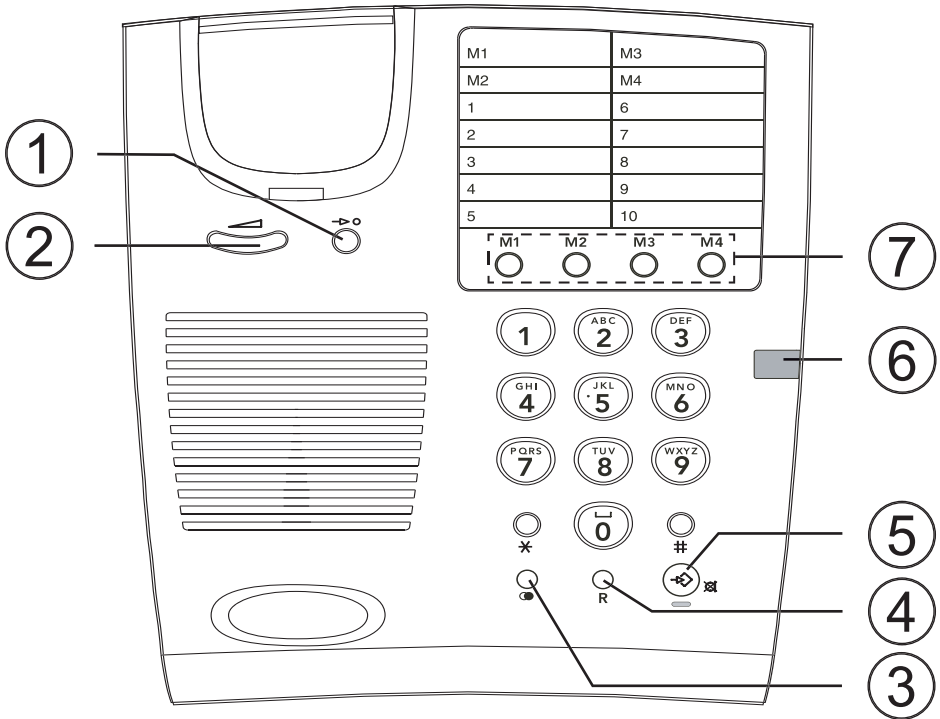



English (see page 4-8)

- 1 Memory button
- 2 Handset Volume Control
- 3 Redial/Pause button
- 4 Recall button
- 5 Store/Mute button and LED
- 6 Visual Ring/Message Waiting indicator
- 7 One Touch Memories

Operation

Connection

1. Connect the curly cord to the handset and to the socket marked  on the underside of the telephone.
2. Connect the telephone line cord to the socket marked  on the underside of the telephone, and then to a telephone network wall socket.
3. You will hear a click when the modular plug is correctly in place.
4. Lift the handset and listen for the dial tone. Your telephone is now operational.

Ringer


On the underside of the telephone there are switches to adjust the ringer, tone and volume:

 ...  Ringer volume



 ...  Ringer type

 ...  Ringer tone


Volume control

The handset earpiece volume may be adjusted during a call using . Press the right side of the button to increase and the left side to decrease the volume.

Mute button

The handset microphone can be disabled during a call by pressing . Press  once more to reactivate the microphone. The LED next to the button flashes when the microphone is muted.

Redial button

If the number dialled is engaged or if you wish to redial the last number dialled, lift the handset and press the redial button .

Settings

Memory

The telephone will store 4 one-touch and 10 two-touch memories for frequently dialled telephone numbers.

When a number is stored in memory, you need only press one or two buttons dependant on location to make a call. One-touch memories are numbered M1-M4, two-touch memories are stored using the telephone keypad digits **0-9**.

Storing One-touch Memories

1. Lift the handset and press **⇒** (ignore anything you hear in the earpiece).
2. Select a memory location (M1-M4) by pressing the corresponding button.
3. Enter the phone number to be stored (up to 21 digits).
4. Press **⇒** again.
5. Replace the handset. The number is now stored.

Dialing using One-touch Memories

1. Lift the handset and wait for a dialling tone.
2. Dial the desired number by pressing the corresponding memory location (M1-M4).


Storing Two-touch Memories

1. Lift the handset and press **⇒** (ignore anything you hear in the earpiece).
2. Press **→○**.
3. Select a memory location by pressing one of the keypad numbers **0-9**.
4. Enter the phone number to be stored (up to 21 digits).
5. Press **⇒** and replace the handset. The number is now stored.



Dialing using Two-touch Memories

1. Lift the handset and wait for a dialling tone.
2. Press **→○**.
3. Select the memory location where the number is stored by pressing the relevant keypad number **0-9**.

Press **●** if you need a pause in the telephone number. If a stored number changes, enter the new number in the location of the old one following the procedures above. As a memory aid names or numbers can be written on the memory index card. To remove the memory card (after detaching the desk top bracket) press and hold down the button located on the underside of the telephone (see diagram).



Recall

Access to additional network services can be gained by using the recall button **R**,  and  keys. Contact your network operator for more information.

Press the recall button **R** followed by the extension number to transfer a call when connected to a PBX (TBR only).

Wall mounting

The telephone can be wall mounted using two screws positioned vertically at a distance of 100mm. Remove the desktop bracket. The screws should then fit into the two ‘keyholes’ on the back of the telephone. The telephone can also be directly mounted to the standard Australian wall plate.

Hearing Aid compatible


This telephone is hearing aid compatible. Select the T mode on your hearing aid to enable this feature.


Recall Button Timing

There are different Recall Button Timings available: 100, 300 and/or 600 ms, using the **R** switch located beneath the protective cover and label. Please refer to page 5 for instructions to remove this protective cover. The standard setting is 100 ms for UK/AU and 600 ms for NZ, in normal domestic use this setting should not require changing.

Message Waiting Indicator

Some PBX systems have a function called Message Waiting.



On the under side of the telephone is a switch marked (MW), this is used to select one of the following options: LED+, LED-, Visual Ring Indicator () and high voltage (HV).

By selecting the appropriate option for your system the telephone will indicate if there are any voice mail messages available.

This function operates differently depending on the PBX system in question therefore please contact your system administrator for more information.

If the unit is not connected through a PBX please select ring indication (.

Other

Tone/Pulse Dialling (UK only)

You can select either Tone (🎵) or Pulse (...) dialling using the switch located on the right hand side of the unit. A small flat blade screwdriver or similar object will be required. Normal=🎵.

Troubleshooting

Test the equipment on a known working line (e. g. at a neighbour's). If the product works then the fault is with the line. If the telephone still does not work, contact the place of purchase for service. Do not forget the receipt or a copy of the invoice.

UK

If you cannot resolve the fault using the faultfinder section, technical support is available on the **Premium Rate Number: 0906 302 0114**.

Calls cost **50 pence per minute** (prices correct at the time of going to press), and is operational between 9AM - 5PM Monday-Friday excluding Bank Holidays. Alternatively,

E-mail on: tech@doro-uk.com

You can contact us in writing: Consumer Support Group, Doro UK Ltd., 22 Walkers Road, North Moons Moat, Redditch, Worcestershire, B98 9HE, (regarding any Spares or Technical query), or

Telephoning (Spares only): 01527 584377

Web site: www.doro-uk.com



Guarantee

This product is guaranteed for a period of 12 months from the date of purchase. Proof of purchase is required for any service or support required during the guarantee period.

This guarantee shall not apply to a fault caused by an accident or a similar incident or damage, liquid ingress, negligence, abnormal usage or any other circumstances on the purchaser's part. Furthermore, this guarantee shall not apply to a fault caused by a thunderstorm or any other voltage fluctuations.

This guarantee does not in any way affect your statutory rights. (As a matter of precaution, we recommend disconnecting the telephone during a thunderstorm.)

Australia and New Zealand

Products permitted for connection to the telephone network are marked with  in Australia and  **TELEPERMIT** in New Zealand. These marks indicate the products comply with the regulations and can be used without concern in the country of purchase.

If you believe this product is malfunctioning, please refer to the relevant section and/or consult the troubleshooting guide in this manual to ensure that you have followed the instructions carefully. As an alternative you can visit our web site for FAQ's or send an e-mail for a prompt reply.

Guarantee

This product is guaranteed for a period of 12 months from the date of purchase. Should you experience difficulties with the product, please contact us for assistance. If the product is then found to be faulty you will be asked to return it directly to us with a copy of the purchase receipt.

This guarantee shall not apply to a fault caused by an accident or a similar incident or damage, liquid ingress, negligence, abnormal usage or any other circumstances on the purchaser's part. Furthermore, this guarantee shall not apply to a fault caused by a thunderstorm or lightning, excessive or any other voltage fluctuations or faults on the telephone line. (As a matter of precaution, we recommend disconnecting the telephone during a thunderstorm). This guarantee does not affect your statutory rights.

AUSTRALIA

DORO Australia Pty Ltd
PO Box 6760
Baulkham Hills BC NSW 2153
Australia

NEW ZEALAND

Atlas Gentech (NZ) Limited
Private Bag 14927
Panmure
Auckland
New Zealand

Consumer Support

Ph: 1300 885 023
Fax: (02) 8853-8489
Email: support@doro.com.au
Web site: www.doro.com.au

Consumer Support

Ph: 0900-500-25 (Toll Call)
Fax: (09) 574-2722
Email: support@atlasgentech.co.nz

Other

REN (RN for New Zealand)

The REN (Ringer Equivalence Number) or (RN) is of significance only if you wish to connect more than 1 telephone to your telephone line. A standard telephone line has a maximum REN capacity of 3 (RN of 5). It is possible to connect 3 devices with a REN of 1 (RN of 1) with no degradation to the product's performance. Exceeding this limit may cause the volume of the ringer in any phone to decrease or not ring at all.

DECLARATION OF CONFORMITY

WE DORO AB
Of Skiffervägen 80
SE-224 78 Lund
Sweden

As the EU/EES/EC/EEA Authorised representative declare under our sole responsibility that the product

Model: AFTI 22
Description: Corded telephone

IS IN CONFORMITY WITH R&TTE DIRECTIVE: 1999/5/EC

Authorised by:

Signed  _____

Name (printed): Per Carlenhag
Position in company: Quality Manager
Date of issue: 25 November 2002

Copies of this document will be held on file for a period of 10 years after the last production.

Supplier: DORO AB Skiffervägen 80 SE-224 78 Lund Sweden
Product: AFTI 22



This product is in conformity with the essential requirements of the following specifications:

Safety - EN 60950
EMC - EN 55022/55024
Electrical Performance - CTR 37/38

This product is intended for connection to analogue PSTN lines within the following countries: United Kingdom, Sweden, Norway, France, Denmark, Finland and Switzerland. However, due to differences between the individual PSTN's provided in the different countries, the approval does not, of itself, give an unconditional assurance of successful operation on every PSTN network termination point.

Flash recall function will only work in country of purchase.



English

Version 2.0